

SolarEdge Single Phase StorEdge™ Solutions for North America

Authorized Agent:



香港可再生能源有限公司



SolarEdge StorEdge™ Solutions Benefits:


- More Energy DC-coupled architecture stores PV power directly to the battery without AC conversion losses
- Simple Design & Installation single inverter for PV, battery storage, grid-tied and backup applications
- **Enhanced Safety** no high voltage during installation, maintenance or firefighting
- Full Visibility monitor battery status, PV production, remaining backup power and self-consumption data



SolarEdge Single Phase StorEdge™ Solutions for North America

StorEdge™ Features:

- Smart Energy Management export control, time-of-use shifting, maximized self-consumption, demand response and peak shaving capabilities
- Backup power automatically provides power to backed-up loads in the event of grid interruption
- All-in-one solution uses a single DC optimized phase inverter to manage and monitor both PV generation and energy storage
- Compatible with Tesla Powerwall Home Battery and the LG Chem RESU.

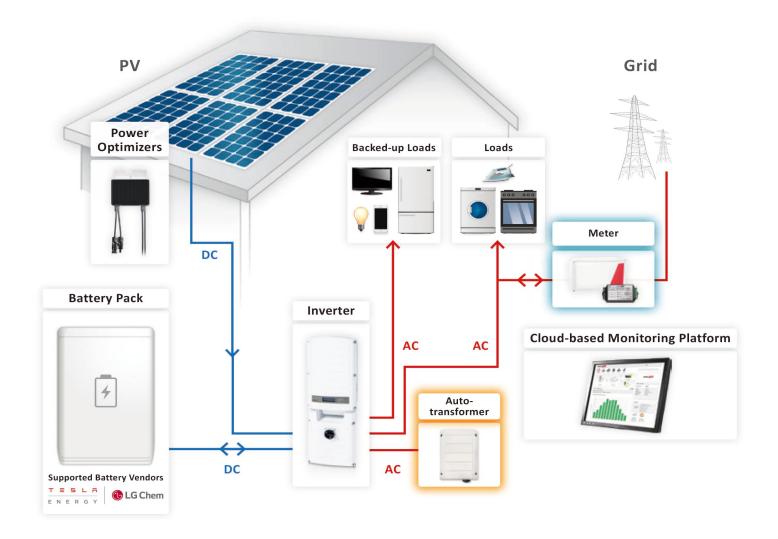

SolarEdge StorEdge [™] Solutions for North America - Product Selector					
	Grid-tied solar, backup power and smart energy management	Grid-tied solar and backup power	Grid-tied solar and smart energy management		
Single Phase StorEdge™ Inverter	✓	✓	✓		
Auto-transformer	✓	✓			
SolarEdge Electricity Meter	✓		✓		
Battery	✓	✓	✓		



SolarEdge Single Phase StorEdge Inverter

for North America SE7600A-US(1)

- Single inverter for PV, grid-tied storage and backup power
- Includes the hardware required to provide automatic backup power to backed-up loads in case of grid interruption
- Includes all interfaces needed for hattery connection.

	Lower Pov	wer Output	Higher Pov	ver Output	
OUTPUT - AC (LOADS/GRID)					
Rated AC Power Output		76	500		VA
Max AC Power Output		83	350		VA
AC Output Voltage Min-Nom-Max (L-L) ⁽²⁾		211-2	40-264		Vac
AC Frequency Min-Nom-Max (2)		59.3 - 6	60 - 60.5		Hz
Maximum Continuous Output Current @240V		3	32		Α
GFDI			1		А
Utility Monitoring, Islanding Protection, Country Configu-		Υ	'es		
rable Thresholds					
Charge Battery from AC (if Allowed)		Υ	'es		
THD		<	<3		%
Power factor with rated power	>	0.99 (configurable; 0.	9 leading to 0.9 laggir	ng)	
Typical Nighttime Power Consumption		<	<5		W
OUTPUT - AC (BACKUP POWER)(3)					
Rated AC Power Output		500	00 (4)		VA
Max AC Power Output - Surge		660	00 (4)		VA
AC Output Voltage Min-Nom-Max (L-L)		211-2	40-264		Vac
AC Output Voltage Min-Nom-Max (L-N)		105-1	20-132		Vac
AC Frequency Min-Nom-Max			60 - 65		Hz
Maximum Continuous Output Current @240V - Backup Mode			21		A
Max Continuous Output Current per Phase @120V			 25		Α
GFDI			1		Α
AC Circuit Breaker			'es		
THD			<5		%
Power factor with rated power	0.2 leading to 0.2 lagging		/0		
Automatic switchover time	0.2 leading to 0.2 lagging		sec		
Typical Nighttime Power Consumption			\ <5		W
,, ,			' J		VV
INPUT - DC (PV and BATTERY)			/a.a		Ī
Transformer-less, Ungrounded			'es		\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
Max Input Voltage	500		Vdc		
Nom DC Input Voltage			00		Vdc
Reverse-Polarity Protection			'es		
Ground-Fault Isolation Detection			ensitivity		
Maximum Inverter Efficiency			98		%
CEC Weighted Efficiency		9	7.5		%
INPUT - DC (PV)					
Maximum DC Power (STC)		10	250		W
Max Input Current (5)	23		Adc		
2-pole Disconnection		Y	'es		
INPUT - DC (BATTERY)					
Continuous Peak Power	33	300	66	00	W
Number of Batteries per Inverter	1	2 for high capacity	1	2 for high power	
				and high capacity	
Supported Battery Types	Tesla Powerwall 1	Tesla Powerwall 1	LG Chem RESU10H	Tesla Powerwall 1	
				(any combination	
				other than B+B)	
Max Input Current	8	.5	17	7.5	Adc
2-pole Disconnection		Υ	'es		
DC Fuses on Plus and Minus	12A (field r	eplaceable)	25A (field r	eplaceable)	
ADDITIONAL FEATURES					
Supported Communication Interfaces	RS48	35 for battery, RS485,	Ethernet, ZigBee (opt	tional)	
Battery Power Supply		Yes, 12	V / 53W		
Revenue Grade Data, ANSI C12.1		Opti	onal ⁽⁶⁾		
Integrated AC, DC and Communication Connection Unit		Y	'es		
AC Disconnect		Υ	'es		
AC DISCONNECT					
Manual Inverter Bypass Switch		Υ	'es		
			es 2014 and 2017 690.1	2	

⁽¹⁾ These specifications apply to inverters with part numbers SE7600A-USS2XXXXX and connection unit model number BCU-1PH-USS (2) For other regional settings please contact SolarEdge Support (3) Not designed for standalone applications and requires AC for commissioning (4) The rated AC power output is the minimum between the AC Power Output and the battery continuous peak power (5) A between the AC Power Output and the battery continuous peak power (5) A between the AC Power Output and the battery continuous peak power (5) A between the AC Power Output and the battery continuous peak power (5) A between the AC Power Output and the battery continuous peak power (6) A between the AC Power Output and the battery continuous peak power (6) A between the AC Power Output and the battery continuous peak power (6) A between the AC Power Output and the battery continuous peak power (6) A between the AC Power Output and the battery continuous peak power (6) A between the AC Power Output and the battery continuous peak power (6) A between the AC Power Output and the battery continuous peak power (6) A between the AC Power Output and the battery continuous peak power (6) A between the AC Power Output and the battery continuous peak power (6) A between the AC Power Output and the battery continuous peak power (6) A between the AC Power Output and the battery continuous peak power (6) A between the AC Power Output and the battery continuous peak power (6) A between the AC Power Output and the BC Power Output

⁽⁶⁾ Revenue grade inverter P/N: SE7600A-USS20NNM2




SolarEdge Single Phase StorEdge Inverter

for North America SE7600A-US

	Lower Power Output	Higher Power Output	
STANDARD COMPLIANCE			
Safety	UL1741, UL1699B, UL1998, CSA 22.2		
Grid Connection Standards	IEEE1547, Rule 21, Rule 14		
Emissions	FCC part15 class B		
INSTALLATION SPECIFICATIONS			
AC Output (Loads/Grid) conduit size / AWG range	1" / 14-6 AWG		
AC Output (Backup) conduit size / AWG range	0.75-1" knockouts / 14-6 AWG		
AC Input (Auto-transformer) conduit size / AWG range	0.75-1" / 14-6 AWG		
DC Input (PV) conduit size / AWG range	0.75" / 14-8 AWG		
DC Input (Battery) conduit size / AWG range	0.75" / 16-10 AWG		
Dimensions with Connection Unit (HxWxD)	37 x 12.5 x 7.2 / 940 x 315 x 184		in / mm
Weight with Connection Unit	58.5 / 26.5		lb / kg
Cooling	Natural convection and internal fan (user replaceable)		
Noise	<50		dBA
Min - Max Operating Temperature	-13 to +140 / -25 to +60		°F/°C
Protection Rating	NEM	A 3R	

Inverter Interface

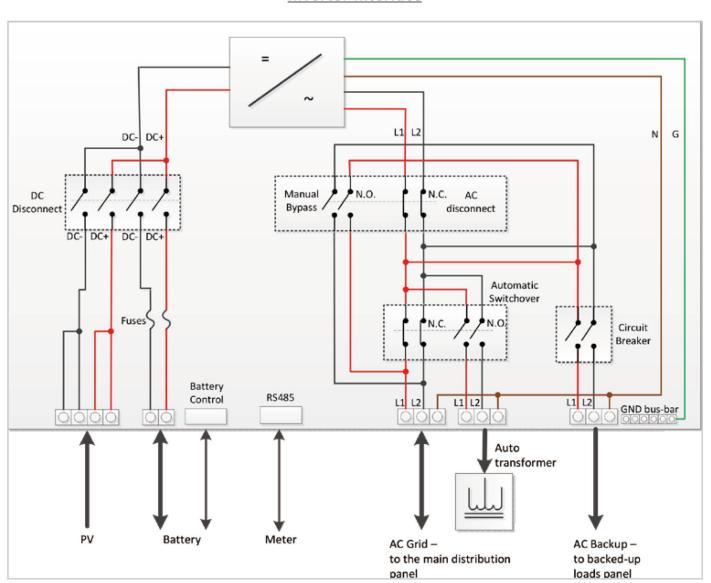



SEAUTO-TX-5000

	SEAUTO-TX-5000	
ELECTRICAL RATINGS		'
Rated Power - Continuous	5000	
Rated Power - Peak	7600 for 10sec	VA
Output Voltage	120/240V Split Phase	
Max Continuous Output Current per Phase @120V	25	A
Split Phase Imbalance (@Rated Power)	Yes, up to 25A difference between phases	
Thermal Protection	Yes	
NSTALLATION SPECIFICATIONS		
AC Output conduit size / AWG range	0.75" / 14-6 AWG	
Dimensions (HxWxD)	6.7 x 7.9 x 5.5 / 170 x 200 x 140	in / mm
Weight	29.7 / 13.5	lb/kg
Min - Max Operating Temperature	-13 to +140 / -25 to +60	°F/°C
Protection Rating	NEMA 3R	
nstallation	Wall mounted	





SolarEdge Electricity Meter for North America

SE-MTR240-2-200-S1 / SE-MTR240-2-400-S1



Authorized Agent:



香港可再生能源有限公司 long Kong Renewable Energy Co. Ltd. 地址:香港九龍旺角彌敦道610號荷李活商業中心18樓

電話: 2960 0193 郵箱: cmli@live.hk

傳真: 2960 0553 網址:http://www.hkre.com.hk/







